


***Uncompromising
Commitment to Quality***



Technical Excellence and Reliability through Satake's Safety and Quality Control System

Satake has established its present reputation as a prominent manufacturer of high-performance and high-quality mixers through more than 90 years of uncompromising research and development efforts. To continually meet customer demands, Satake continues to develop widely ranging expertise based on its various measuring techniques which other mixer manufacturers cannot offer.

Both domestically and abroad, Satake has consolidated its operation bases as the industry's pioneer and its exports are growing steadily. Furthermore, the company is strictly committed to ensuring the safety and quality of its products so that they can always be relied on with complete confidence by their users.

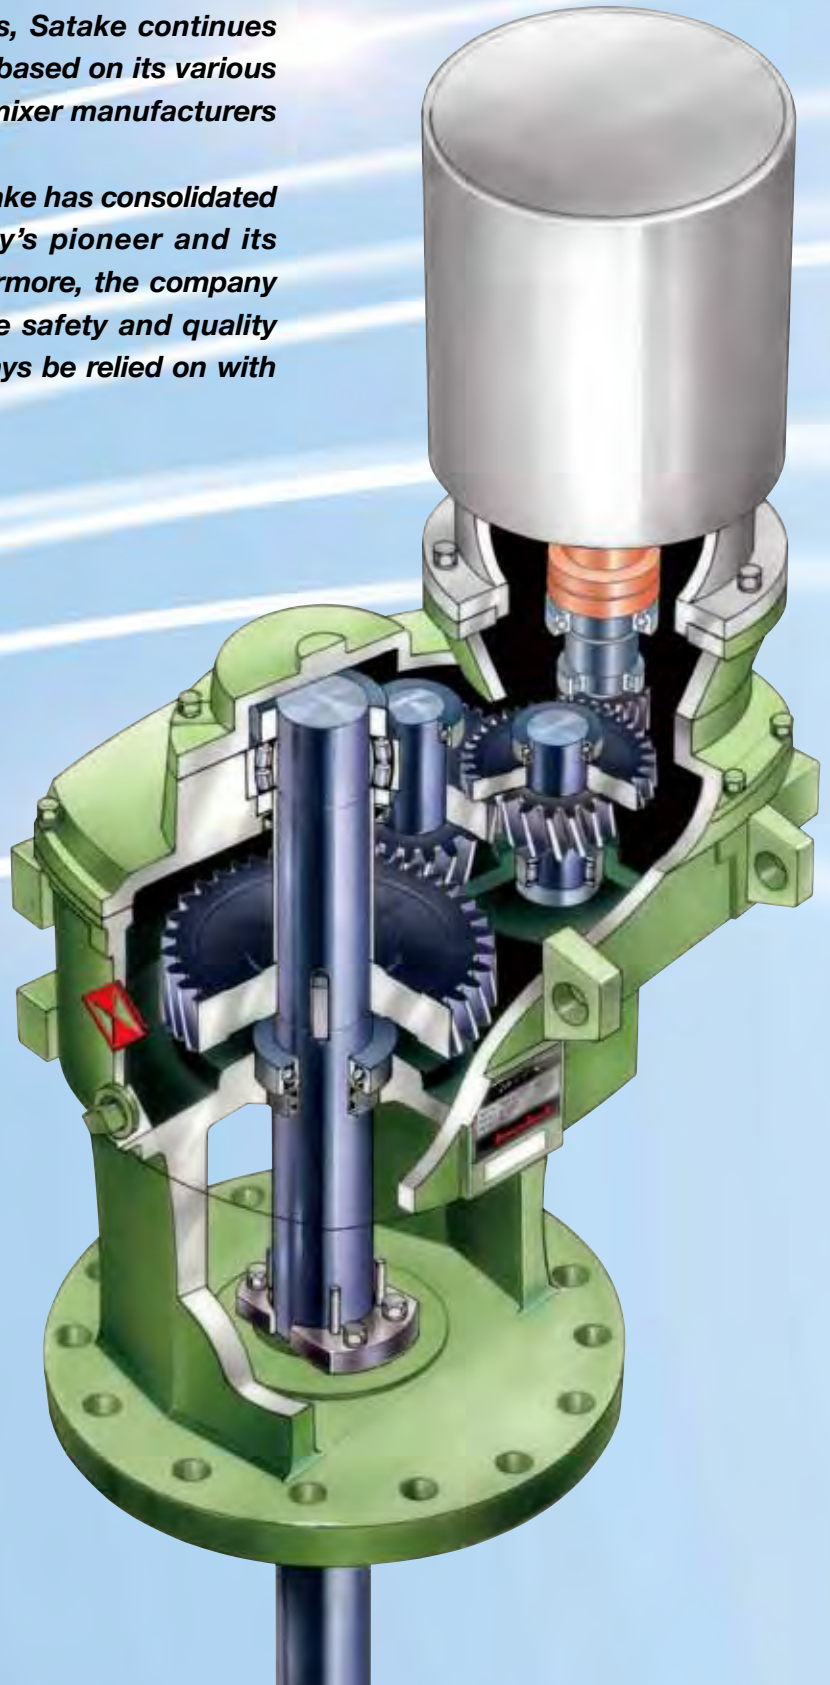

Satake Multi S Mixers Series

C O N T E N T S

Features.....	2
Model Coding/Safety and Quality Control	3
Model Variations.....	4
Dimensional Drawings — Top-mount Type	5
Dimensions — Top-mount Type	6
Dimensions and Dimensional Drawings — Side-mount Type	7
Impellers/Impeller Performance Comparison.....	8
Shaft Sealing Systems — Top-mount Type.....	9
Shaft Sealing Systems — Side-mount Type	10
Replacement of Mechanical Seal.....	11
Dimensional Drawings for Removable Mechanical Seal	13
Dimensions for Removable Mechanical Seal ...	14



Mixers of the New Century

By making best use of advanced measuring techniques, flow visualizing methods, imaging equipment, laser Doppler Velocity Meters (LDV) and computers, Satake has further upgraded the reliability, functionality and safety of its mixers. The company's mixer series has been newly joined by those which allow for safe and easy removal of mechanical seals in case of need. Satake is pleased to present the latest lineup of its superb new-generation mixers.

Features

1. *Mixers are made more compact through the rearrangement of gear arrays.*
2. *Substantial cost reduction is made possible through the increased use of common parts.*
3. *The combination of rotation speed and motor output can be set in 17 different steps, a range far greater than that preceding models.*
4. *The newly developed 3-bladed axial flow 1-stage impeller achieves high discharge coefficient and low drag coefficient. This simplified impeller provides even higher performance than 4-bladed pitched paddle, 2-stage impellers.*
5. *These mixers can be used with any type of motor sold on the market.*
6. *With some of these new mixers, mechanical seals can be easily attached or detached without removing the mixers from their place of installation.*



Satake Multi S Mixer (S3~S9 series) meets the Machinery Directive of CE marking, however, this is limited to the mixers which are not explosion-proof type and whose sealing is gland packing.




S5 top-mount mixer with removable mechanical seal system



S5 top-mount two-/three-step gear reduction type



S4 top-mount one-step gear reduction type

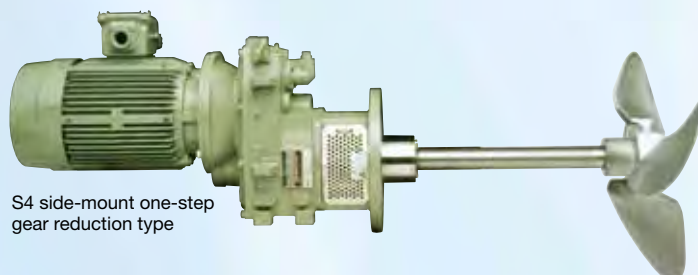


S4 side-mount one-step gear reduction type


Consult Us to Select Optimal Models that Meet Your Desi

Model Coding

(Example)

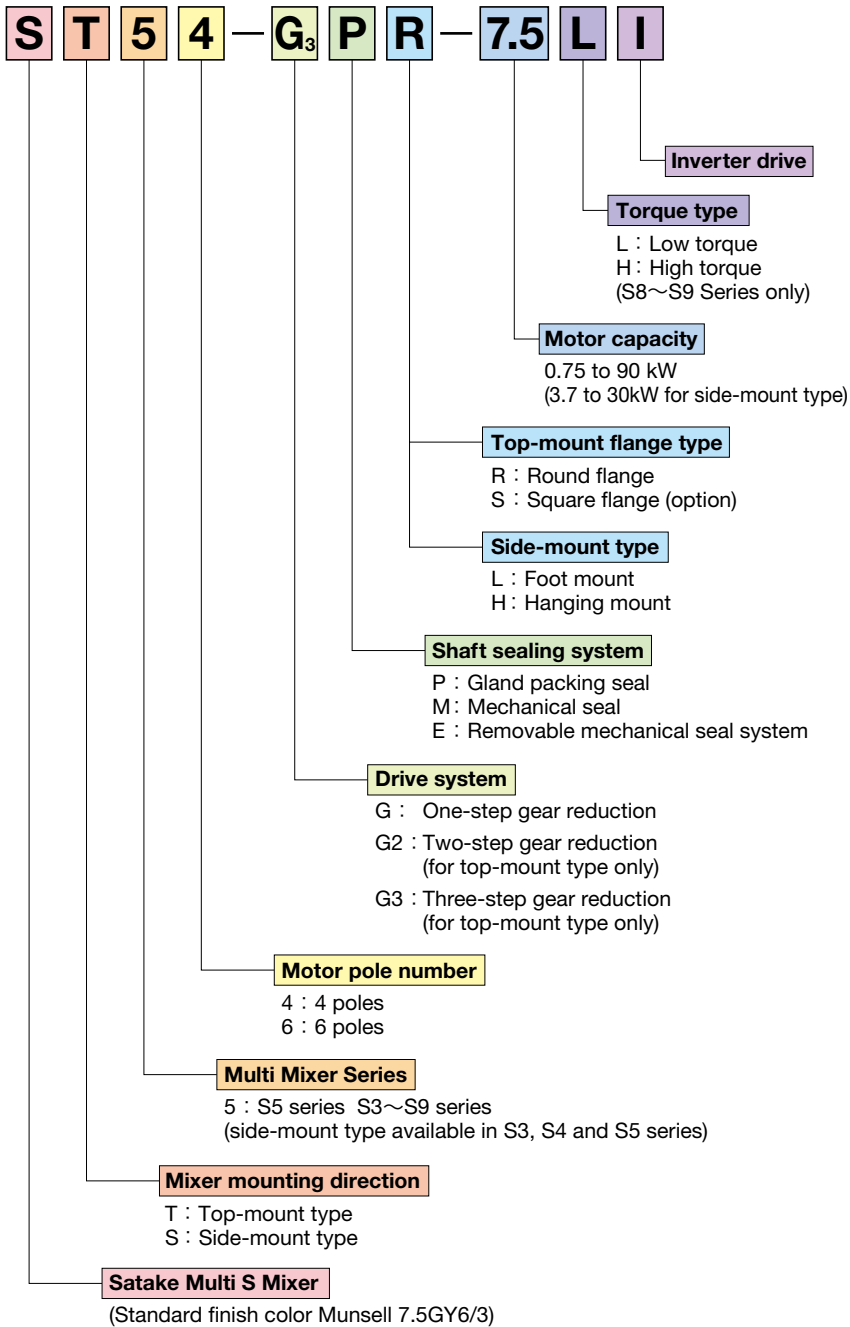

Safety and Quality Control

Satake's mixers all carry  labels to indicate that we are actively involved in the comprehensive safety control and quality assurance system with due consideration given to the PL (Product Liability) Law. Our quality assurance system covers the entire process from product development all the way through to the sale and after-sale services. Each independent process of this system is adeptly handled by the sections and departments in charge which have their established quality assurance programs.

Satake's R&D and other sections are staffed by highly skilled and experienced personnel. The company's techniques and expertise based on such human resources are effectively implemented at its plants which are complete with various high-tech equipment and inspection facilities including FMS.

This is why Satake's Multi S Mixers, produced under strict safety and quality control, can always be relied on by their users.

Operation that liquid level passes over impeller's position and empty operation

Operation that the liquid level passes over the impeller's position:

It means the operation within ten minutes from the stable condition which does not generate suction vortices constantly (Minimum liquid level in the drawing) to the condition that the lowest impeller exposes completely in air (or the opposite procedures) when a liquid increases or decreases during a mixing operation. If the operation mentioned above continues for ten minutes or more, the operation is called "Aeration" (Unstable condition that generates suction constantly and the impeller hits the liquid surface severely.) The aeration causes shaft bending etc.

Empty operation:

It means that the lowest impeller rotates in air by operation that the liquid level passes over the impeller's position etc. In empty operation, liquid has no damping and that causes shaft bending. Stop the operation within ten minutes.



Model Variations — Top-mount Type (50 Hz)

		Motor output (kW)																
		Speed (min ⁻¹)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90
One-step gear reduction	350					S3	S3	S4	S4	S5	S5	S5						
	280					S3	S3	S4	S4	S5	S5	S5						
	230(*)				S3	S3	S4	S4	S5	S5	S5							
	190(*)				S3	S3	S4	S4	S5	S5	S5							
Two-step gear reduction	155			S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	125		S3	S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	100		S3	S3	S4	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	84		S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S7	S8L	S8L	S8H	
	68		S3	S3	S4	S5	S5	S5	S6	S6	S6	S7(*)	S7(*)	S8L(*)	S8L(*)	S8H(*)		
	56										S6	S7(*)	S7(*)		S8L(*)	S8H(*)		
Three-step gear reduction	56	S3	S3	S4	S4	S5	S5	S6	S6				S7					
	45	S3	S3	S4	S5	S5	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	
	37	S3	S4	S4	S5	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H	
	30	S3	S4	S4	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H		
	25	S3	S4	S5	S5	S6	S6	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H			
	20	S4	S4	S5	S5	S6	S6	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H			
	16.5(*)	S4	S5	S5	S6	S6	S7	S7	S8L	S8H	S9L	S9H	S9H					
	13.5(*)	S4	S5	S5	S6	S7	S7		S8H	S9L	S9H	S9H						

(*) in the above table indicates 6P motor.

Model Variations — Top-mount Type (60 Hz)

		Motor output (kW)																
		Speed (min ⁻¹)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90
One-step gear reduction	350					S3	S3	S4	S4	S5	S5	S5						
	280(*)				S3	S3	S4	S4	S5	S5	S5							
	230(*)				S3	S3	S4	S4	S5	S5	S5							
Two-step gear reduction	190			S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	155			S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	125		S3	S3	S3	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	100		S3	S3	S4	S4	S4	S5	S5	S6	S6	S6	S7	S7	S8L	S8L	S8L	
	84		S3	S3	S4	S4	S5	S5	S6	S6	S6	S7(*)	S7(*)	S8L(*)	S8L(*)	S8L(*)		
	68										S6	S6	S7(*)	S7(*)	S8L(*)	S8L(*)	S8H(*)	
Three-step gear reduction	68		S3	S3	S4	S5	S5	S5	S6									
	56	S3	S3	S4	S4	S5	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9L	
	45	S3	S3	S4	S5	S5	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	
	37	S3	S4	S4	S5	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H	
	30	S3	S4	S4	S5	S6	S6	S7	S7	S7	S8L	S8H	S8H	S9L	S9H	S9H		
	25	S3	S4	S5	S5	S6	S6	S7	S7	S8L	S8L	S8H	S9L	S9H	S9H			
	20(*)	S4	S4	S5	S6	S6	S7	S7	S8L	S8L	S8H	S8H	S9L	S9H	S9H			
	16.5(*)	S4	S5	S5	S6	S6	S7	S7	S8L	S8H	S9L	S9H	S9H					

(*) in the above table indicates 6P motor.

Model Variations — Side-mount Type (50/60 Hz)

		Motor output (kW)								
		Speed (min ⁻¹)	3.7	5.5	7.5	11	15	18.5	22	30
One-step gear reduction	50Hz	350		S3	S3	S4	S4	S5	S5	S5
		280		S3	S3	S4	S4	S5	S5	S5
		230(*)	S3	S3	S4	S4	S5	S5	S5	
	60Hz	350		S3	S3	S4	S4	S5	S5	S5
		280(*)	S3	S3	S4	S4	S5	S5	S5	
		230(*)	S3	S3	S4	S4	S5	S5	S5	


- S3 series: Up to 132MJ base size for motor installation (flange outside diameter: 300).
 - S4 series: Up to 160LJ base size for motor installation (flange outside diameter: 350).
 - S5 series: Up to 200LJ base size for motor installation (flange outside diameter: 450).
- (*) in the above table indicates 6P motor.




Compact, Lightweight and Economical, Satake's Multi S

Standard Dimensional Drawings — Top-mount Type


One-step gear reduction

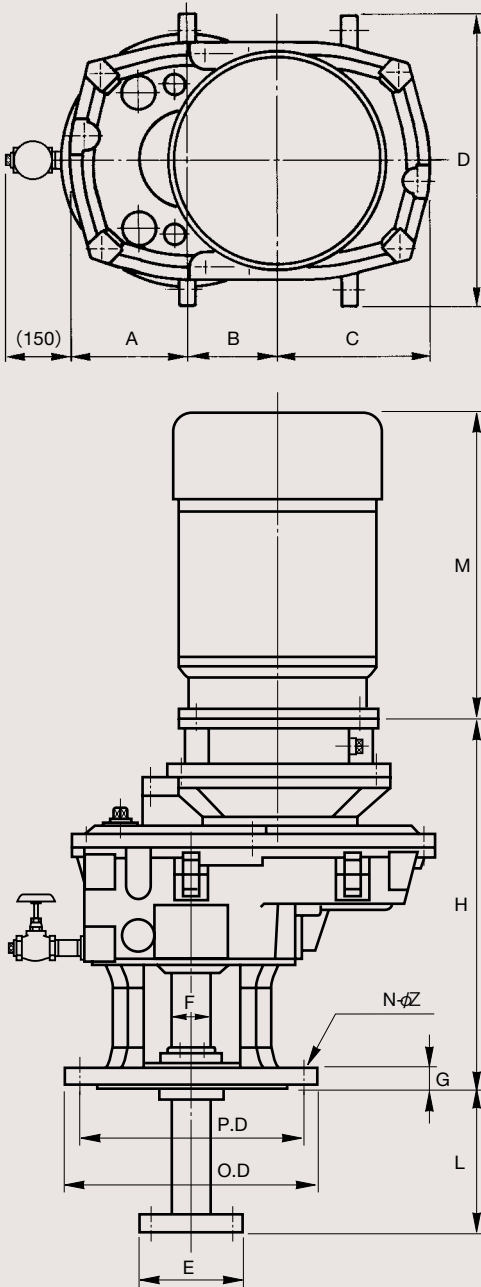


Two-step/three-step gear reduction

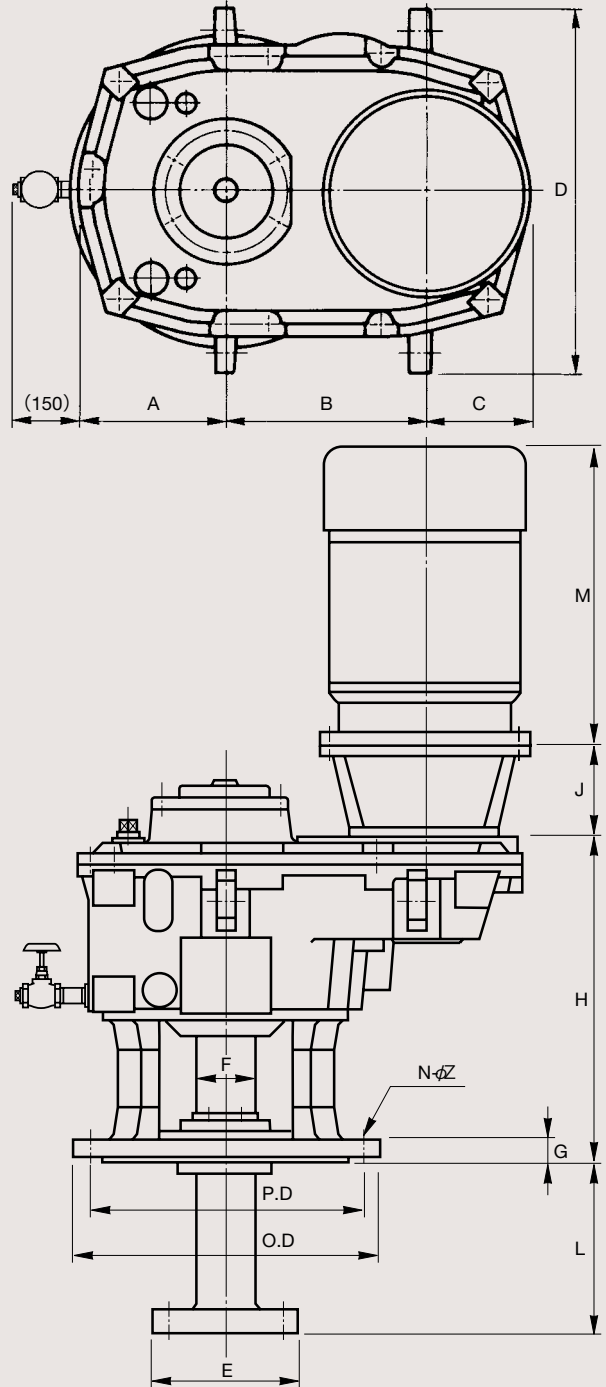

Round flange

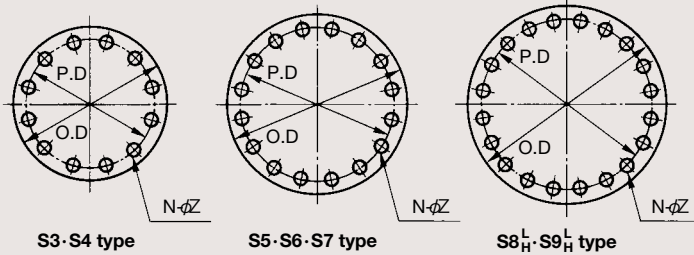

Square flange (option)



Because Satake makes every effort to improve the quality of its products, the product delivered to you may differ somewhat from the shape or specifications of the product described in this catalog.

Mixers Embody the Needs of Today

Standard Dimensions — Top-mount Type

	Series	Motor output (kW)		Dimensions (mm)																	Approximate weight of mixer main unit (kg)** (Motor weight in bracket)			
		4P	6P	O.D	P.D	O.S	P.S	G	N-φZ	N.S	φZS	F	E	L	H	J*	A	B	C*	D	M**			
One-step gear reduction	S3	5.5	3.7	350	310	□350	□305	24	12-23	4	24	55	137	200	510	—	162	119	214	402	400	225	(80)	
		7.5	5.5																			485	315	(110)
	S4	11	7.5	400	355	□400	□350	26	12-25	4	24	65	157	200	579	—	175	138	216	446	400	525	335	(130)
		15	11																			485	315	(110)
	S5	18.5	15	445	400	□445	□395	28	16-25	4	26	85	207	250	683	—	208	176	251	522	400	575	530	(195)
		22	18.5																			615	560	(225)
	S3	0.75	—	350	310	□350	□305	24	12-23	4	24	55	137	200	364	—	162	224	109	402	400	260	150	(17)
		1.5	—																			312	155	(24)
	S4	0.75	—	400	355	□400	□350	26	12-25	4	24	65	157	200	391	—	175	239	115	446	400	260	195	(17)
		1.5	0.75																			312	200	(24)
	S5	2.2	1.5	445	400	□445	□395	28	16-25	4	26	85	207	250	453	12	208	287	141	522	400	328	315	(30)
		3.7	—																			355	330	(48)
	S6	5.5	3.7	490	445	□490	□435	28	16-25	4	28	105	237	300	553	18	251	346	175	623	400	400	540	(80)
		7.5	5.5																			485	560	(110)
	S7	11	7.5	560	510	□560	□490	30	16-27	4	35	120	275	350	656	18	265	381	180	680	400	485	830	(110)
		15	11																			525	850	(130)
	S8L	18.5	15	620	565	—	—	32	20-27	—	—	130	295	350	727	205	290	429	225	762	400	575	1,310	(195)
		22	18.5																			615	1,340	(225)
	S8H	37	—	620	565	—	—	32	20-27	—	—	150	335	350	727	260	290	429	225	762	400	660	1,450	(325)
		45	45																			685	1,470	(365)
	S9L	30	18.5	745	680	—	—	34	20-33	—	—	160	347	400	833	217	353	530	225	921	400	615	2,070	(225)
		37	30																			660	2,170	(325)
	S9H	37	—	745	680	—	—	34	20-33	—	—	180	395	400	833	241	353	530	225	921	400	660	2,300	(325)
		45	37																			685	2,210	(365)


*Dimensions J and C marked with asterisks in the table are based on the totally-enclosed fan-cooled outdoor-type motor. Those dimensions may vary in the case of a totally-enclosed safety-increased motor and totally-enclosed flame-proof motor type of 22kw or more. Also those dimensions may vary depending on the motor manufacture.

**Dimension M marked with asterisk and weight of mixer main unit are based on the totally-enclosed fan-cooled outdoor-type motor.

Standard Dimensions and Standard Dimensional Drawings — Side-mount Type

	Series	Speed (min ⁻¹)	Motor output (kW)	No. of polarities	Dimensions (mm)										Approximate weight of mixer main unit (kg)* (Motor weight in bracket)		
					O.D	P.D	N-φZ	G	F	L	H	C	M*	D			
One-step gear reduction	S3	350	5.5	4	φ350	φ310	12-23	47	55	550	533	750	400	500	260	(80)	
			7.5	4									400	530	260	(80)	
		280	5.5	4									400	530	260	(80)	
			7.5	4									400	600	265	(80)	
			3.7	6									400	500	260	(80)	
			5.5	6									400	530	260	(80)	
			3.7	6									400	590	265	(80)	
			5.5	6									400	650	270	(80)	
	S4	350	11	4	φ400	φ355	12-25	51	65	650	604	890	485	590	360	(110)	
			15	4									525	630	385	(130)	
		280	11	4									485	650	365	(110)	
			15	4									525	680	390	(130)	
			7.5	6									485	600	370	(110)	
			11	6									525	650	385	(130)	
			7.5	6									485	680	360	(110)	
			11	6									525	740	400	(130)	
	S5	350	18.5	4	φ445	φ400	16-25	53	85	850	708	1,000	575	650	620	(195)	
			22	4									575	680	620	(195)	
			30	4									615	710	660	(225)	
			18.5	4									575	710	630	(195)	
		280	22	4									575	740	630	(195)	
			30	4									615	790	670	(225)	
			15	6									575	680	620	(195)	
			18.5	6									615	710	660	(195)	
			22	6									615	740	660	(225)	
			230	15									6	575	790	640	(195)
				18.5									6	615	830	670	(225)
				22									6	615	860	680	(225)

*Approximate mixer main unit weight and Dimension M are based on the totally-enclosed fan-cooled outdoor motor.

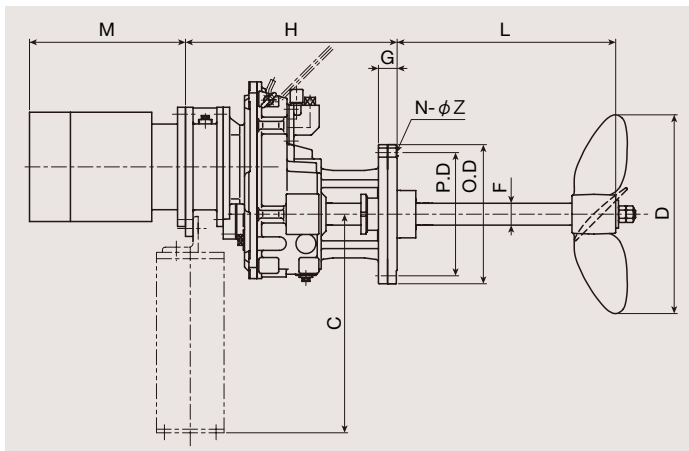


Nozzle Dimensions and Dimensional Drawings for Side-mount Type

Refer to the table below when mounting a side-mount mixer onto a steel mixing tank. If the tank thickness does not provide sufficient strength, use hanger bars, supports, or other appropriate reinforcements.

(Unit: mm)

Series	Nozzle size	A	B	C	D	E	F	G	H	J	t	Z
S3	225A	350	310	241.8	50	9.0	750	9	120	22	12	23
S4	250A	400	355	267.4	55	9.3	850	9	130	24	12	25
S5	300A	445	400	318.5	55	10.3	950	12	150	24	16	25

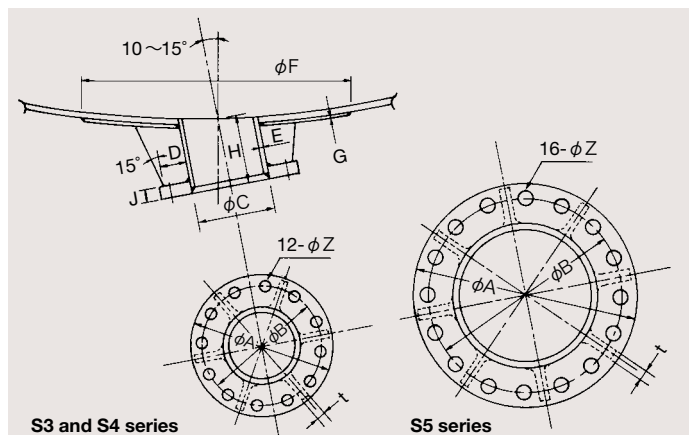

S3 and S4 series

S5 series

Impellers hat Embody Our Commitment to Efficient Mixing

Impeller is the most important part of mixing equipment. This mixer is comes with single-stage 3-bladed axial-flow impeller which is developed through results of high-tech measurement methods such as laser Doppler anemometer and suitable for general-use in low Reynolds number ranges.

HR320 Impeller


The impeller whose blades have angles of advance helps to increase the flow towards the center of the shaft by installing it at an eccentric position.

The bending angle of the blades is slightly varied toward the apex.


This structure contributes to obtain high discharging flow rate and prevents flow separation behind the blades.

The discharging performance increases more than 35 % when compared with the conventional single-stage 4-bladed pitched paddle and an energy saving effect is also produced.

The impeller is welded directly to the mixing shaft so that the installation becomes much easier.

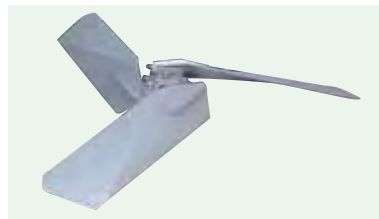

Patent registered in Japan
Design registered in Japan

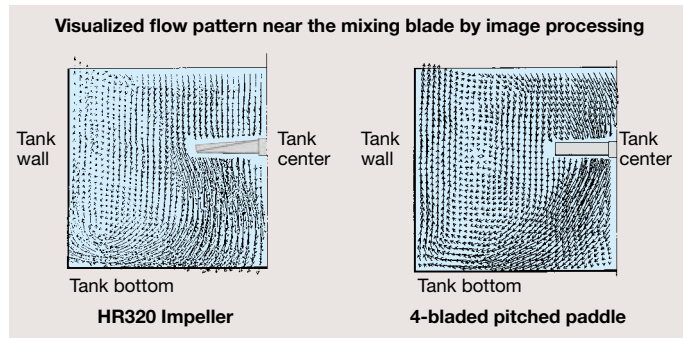

Single-stage HR320 impeller delivers two times better performance than 2 stages 4-bladed pitched paddles by favorable combination of power number (N_p) and discharging coefficient (N_{qd}).

MR205 Impeller

Big pressure difference is produced between the positive pressure part at the forward surface of the main wing and the negative pressure part of the aileron.

The pressure difference provides a strong discharging flow in a radial direction even in a high viscosity liquid.



Design registered in Japan

In addition, the strong upward flow is generated from the tank bottom to the liquid surface by enlarging the lower part of the main wing.

It is suitable for mixing of liquids which have difference in specific gravity or viscosity, suspension of concentrated slurry, and polymerization reaction.

AF100 Impeller (Side-mount Type)


This impeller was developed as a result of many studies and experiments. Airfoil-shaped blade is adopted to drastically improve the discharge efficiency of the blades. The blade tips of this impeller are swept back against the direction of rotation (skewback propeller) to reduce impact deformation due to the inherent cavitation in operation of side-mount mixers.

The AF100 impeller is made of casted stainless steel.

This impeller has 2 types (integral-type if the blade diameter is up to 680mm, and assembled type if diameter is more than 700mm.)




Integral cast type

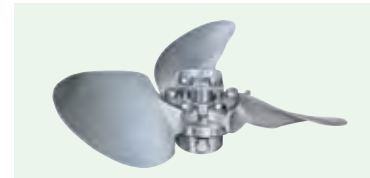

Assembled type

HR320S Impeller

In addition to the swept-forward-wing effect, this impeller can control the pressure on the surface of the blades and also its high attack angle prevents the flow separation there. This impeller has

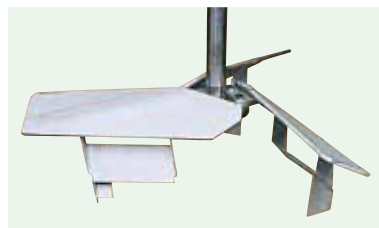

the dual wing structure that gives the same effect as flaps and leading edge slats of an aircraft to achieve high discharging speed.

It is superior in terms of liquid-solid mixing.


Impeller Performance Comparison

Impeller type	Ratio of power number	Ratio of flow number coefficient	Ratio of flow number per power unit	Ratio of required power per unit flow number
	N_p [ratio]	N_{qd} [ratio]	$N_{qd}/N_p^{3/4}$ [ratio]	N_p/N_{qd}^3 [ratio]
4-bladed pitched paddle	Baseline value = 1	Baseline value = 1	Baseline value = 1	Baseline value = 1
HR320 Impeller	0.38	0.98	1.35	0.40
HR320S Impeller	0.47	0.95	1.22	0.55

•The above performance figures are relative values, calculated by giving a baseline value of "1" to the performance levels of 4-bladed pitched paddle.

Shaft Sealing System Variations

Shaft Sealing Systems — Top-mount Type

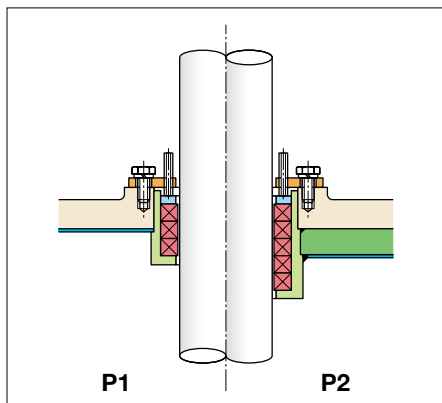

P1

P2


Gland packing seal

P1 type

- Tank temperature: 120°C or less
- Tank pressure: Atmosphere
- This system is not pressure tight. It is suitable for simple sealing.

P2 type

- Tank temperature: 120°C or less
- Tank pressure: 3×10^{-2} MPaG (0.3kgf/cm²G) or less
- Suited for use under low tank pressures.

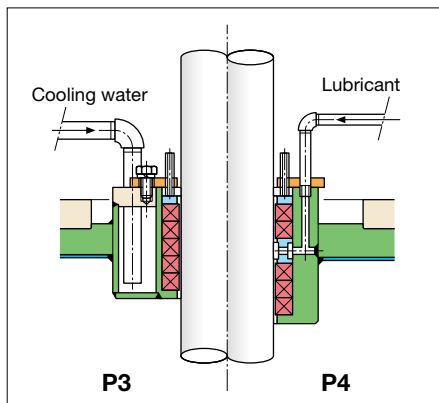

P3

P4


Gland packing seal

P3 type

- Tank temperature: Between 121°C and 170°C
- Tank pressure: 3×10^{-2} MPaG (0.3kgf/cm²G) or less
- Suited for use under the tank temperature of 121°C or more

P4 type

- Tank temperature: 120°C or less
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less
- Inject the lubricant periodically through the middle portion of the gland packing. The packing at the rear end of the lantern ring seals off the flow leakage while the packing at the front end seals off the lubricant.

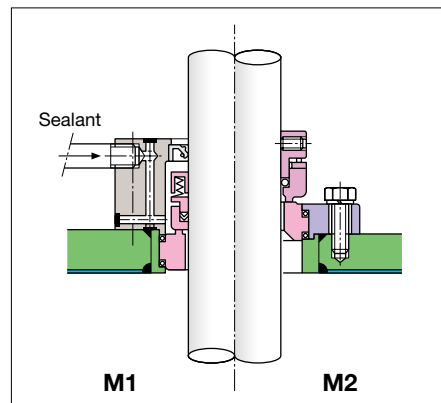

M1

M2

Single mechanical seal (For use in vacuum type mixing tanks)


M1 type

- Tank temperature: 100°C or less
- Tank pressure: F.V~ 3×10^{-2} MPaG (0.3kgf/cm²G) or less
- Generally used in vacuum type mixing tanks where leakage must be avoided. Provides excellent sealing.

Dry mechanical seal

M2 type

- Tank temperature: 150°C or less
- Tank pressure: F.V~0.19MPaG (1.9kgf/cm²G) or less
- Does not require the use of any sealant and thereby is ideal when the mixture or reaction between the sealant and the tank gas or liquid must be avoided.

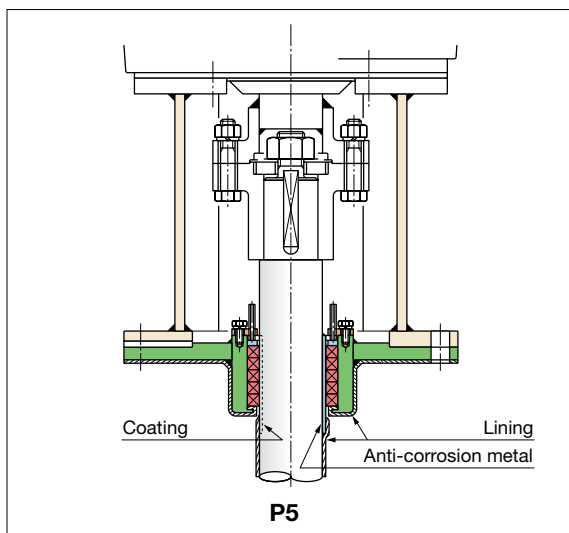


P5

Gland packing seal

(The surfaces exposed to gas or liquid are either lined or coated)

P5 type

- Tank temperature: 120°C or less
- Tank pressure: 3×10^{-2} MPaG (0.3kgf/cm²G) or less
- Various metal lining and coatings (hastelloy, stellite, colmony, hard chrome plating, ceramic) are applied on the sliding surface of the gland packing.

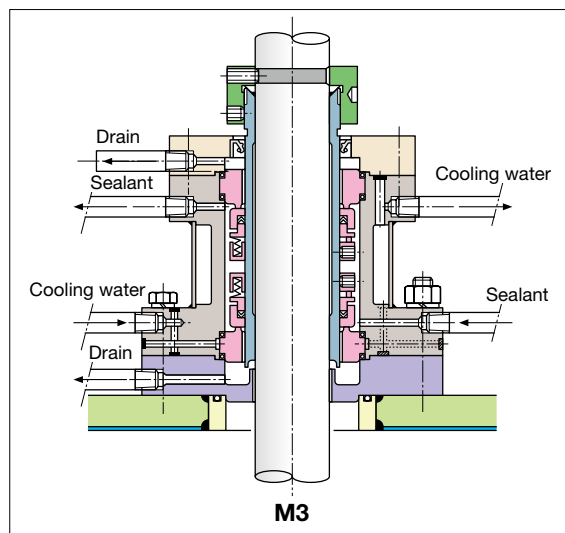


M3

Double mechanical seal

M3 type

- Tank temperature: 300°C or less
- Tank pressure: F.V~0.99MPaG (9.9kgf/cm²G) or less
- Generally used in an environment where leakage must be avoided. Provides excellent sealing under high/low temperature, high pressure and vacuum conditions.

Shaft Sealing Systems — Side-mount Type

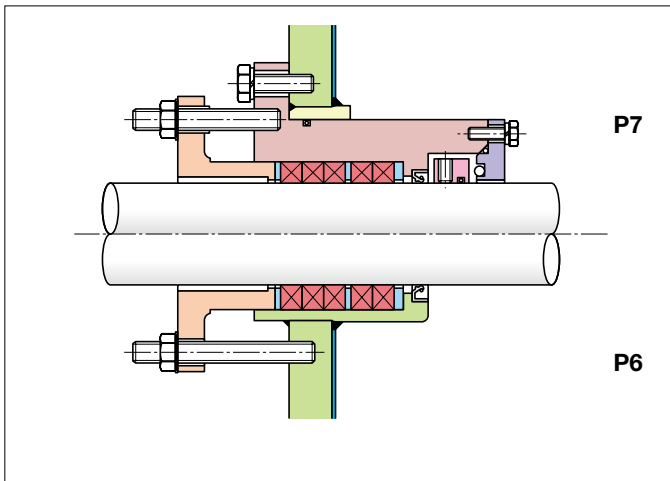

Gland packing seal (provisional seal)


P7 type

- Tank temperature: 120°C or less
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less
- Gland packing can be replaced while tank is full.

Gland packing seal (Standard)

P6 type


- Tank temperature: 120°C or less
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less

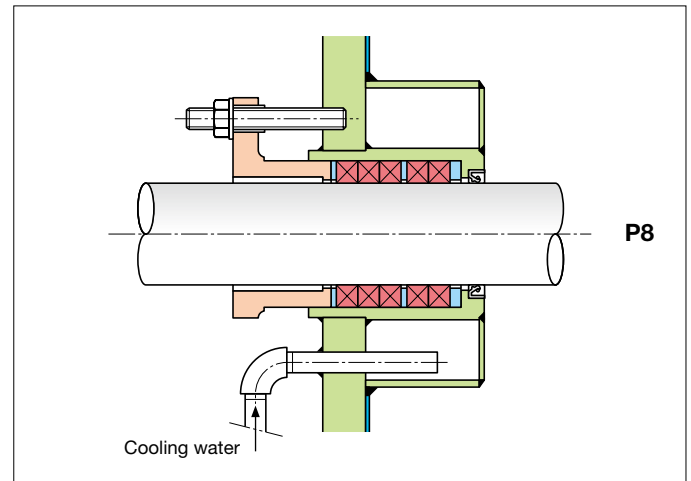

Gland packing seal (forced cooling)

P8 type

- Tank temperature: Between 121°C and 170°C
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less
- Cooling water introduced in jacket for tank temperatures over 121°C.

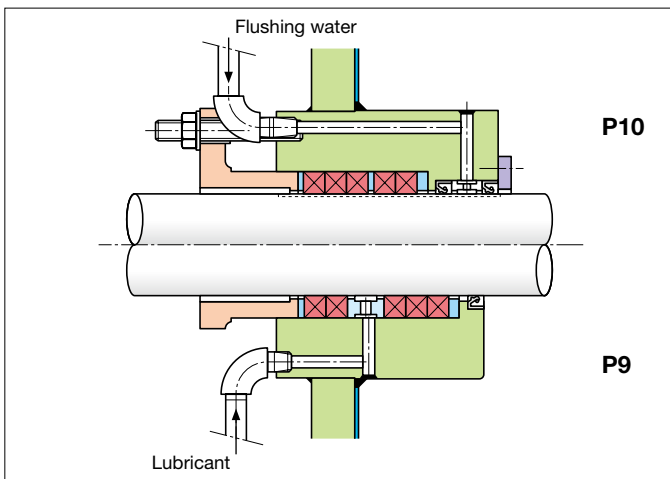

Gland packing seal (for slurry applications)


P10 type

- Tank temperature: 120°C or less
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less
- The shaft surface at the seal is hardened and flushing water is introduced (2 to 3 liters/min) to prevent slurry from entering the seal.

Gland packing seal

P9 type

- Tank temperature: 120°C or less
- Tank pressure: 0.1MPaG (1.0kgf/cm²G) or less
- Inject the lubricant periodically through the middle portion of the gland packing. The packing at the rear end of the lantern ring seals off the flow leakage while the packing at the front end seals off the lubricant.

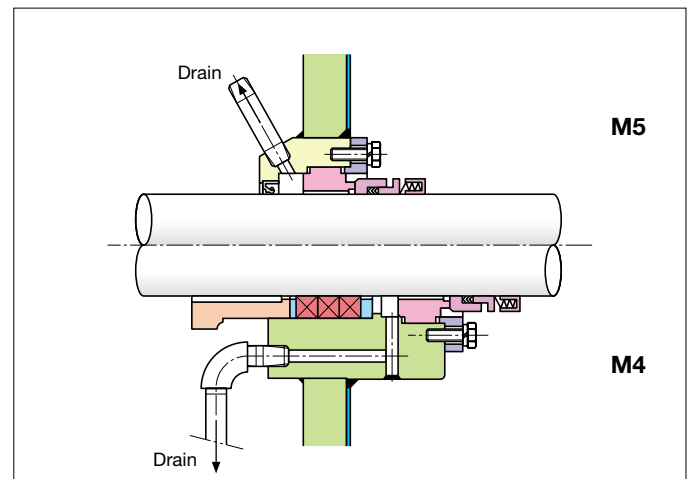

Single mechanical seal

M5 type

- Tank temperature: 120°C or less
- Tank pressure: 0.3MPaG (3.0kgf/cm²G) or less
- Generally use where leakage must be avoided. Provides excellent sealing.

Single mechanical seal + Gland packing

M4 type

- Tank temperature: 120°C or less
- Tank pressure: 0.3MPaG (3.0kgf/cm²G) or less
- If the mechanical seal fails, the gland packing is retightened to seal the tank contents.

**For single mechanical seal, provisional seal type is available.*

Easy Replacement of Mechanical Seal Is the Feature We




Easily Replaceable Mechanical Seals


1. You can easily replace mechanical seals without removing the reduction parts of the mixers even when they are installed under the low ceiling.
2. Reduction parts can be swung to the side so that the mechanical seal unit can be pulled off upward without any interference.
3. Due to the substantial reduction in maintenance time, prolonged stoppage of the operation can be avoided, thus contributing to a higher operation rate.
4. A winch complete with a simple support is optionally available for pulling up and removing the mechanical seal unit.
5. The mechanical seal unit can be removed for safe disassembly, repair, reassembly and leak test at a location away from the operation site.
6. We also offer mixers with a removable simplified mechanical seal system that are not equipped with a gear reduction rotation mechanism (Fig. 3). For these models, a winch or other device installed at the mixer installation site can be used to remove the gear reduction unit. (Other mechanisms are identical to those of standard models.)

Advantages of the Mechanical Seal

The mechanical seal system is generally used in an environment where leakage must be avoided. It provides excellent sealing performance even under high temperature and high pressure conditions.

1. Virtually no leakage (3ml/h or less).
2. The end face contact reduces the sliding area, thereby minimizing friction loss and power consumption.
3. No damage to the drive shaft.
4. Can be used under high PV value conditions. (Unbalanced type: 0.99MPaG, Balanced type: 1MPaG)
5. Can withstand continual operation over 1 to 2 years.
6. By employing the cooling device, it can be used in high temperature liquids (up to +300°C). It can also withstand use in low temperature liquids (-50°C).
7. Retightening and torque adjustment is not necessary.

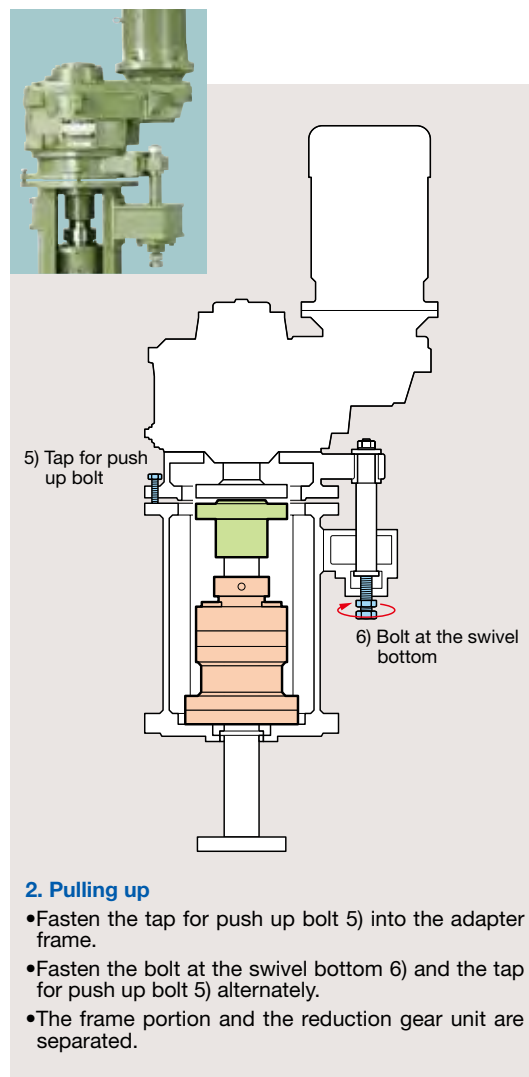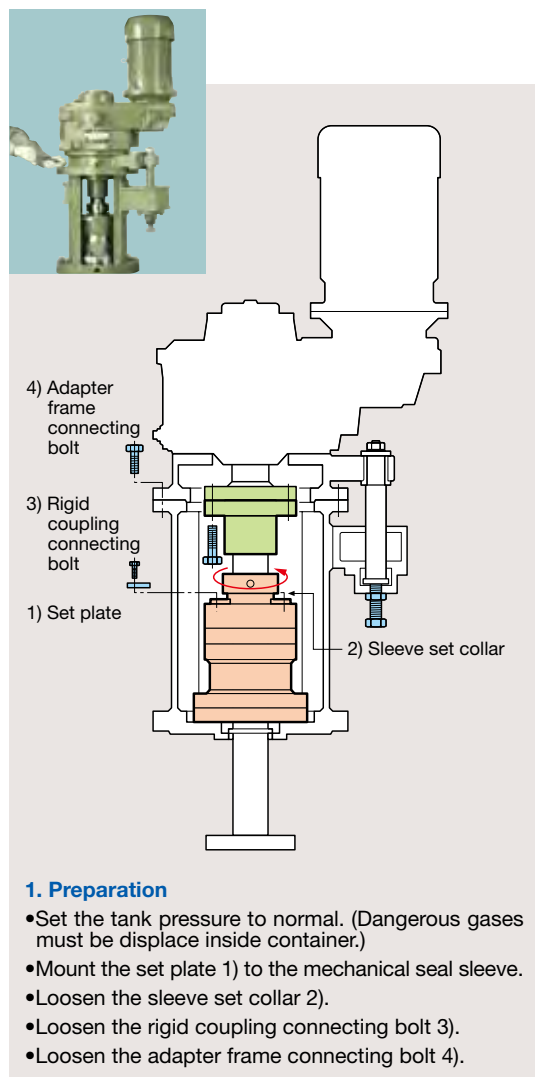

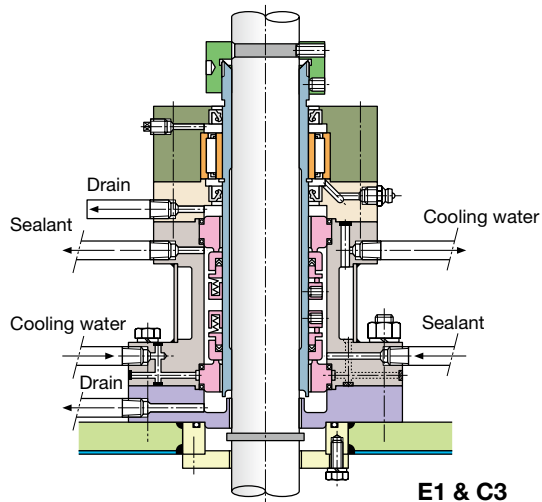


Double mechanical seal (Built-in bearing)

E1 & C3 type

- Tank temperature: 300°C or less
- Tank pressure: F.V~0.99MPaG (9.9kgf/cm²G) or less
(In case that the tank pressure is over 0.99 HPaG, we carry out a study in each case.)
- Generally used in an environment where leakage must be avoided. Provides excellent sealing under high/low temperature, high pressure and vacuum conditions. With the built-in bearing, the shaft deflection of the mechanical seal sliding surface is minimized, contributing to higher sealing performance.

E1 : Swing-type easily replaceable mechanical seal

C3 : Easily replaceable mechanical seal

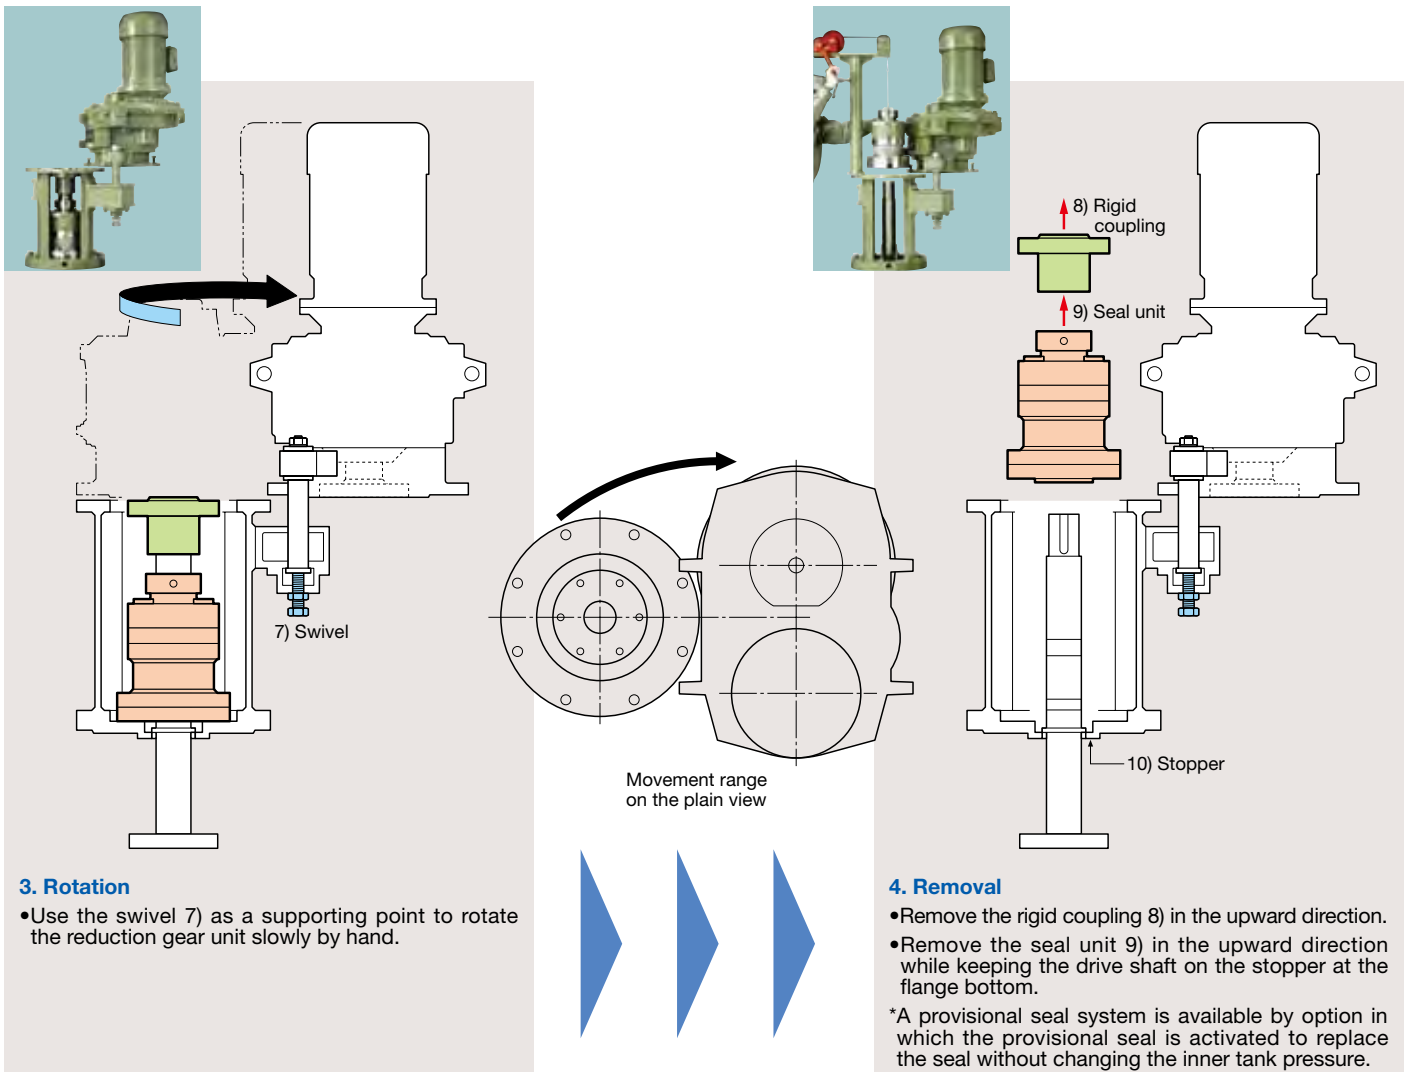

3. Rotation

- Use the swivel 7) as a supporting point to rotate the reduction gear unit slowly by hand.



4. Removal

- Remove the rigid coupling 8) in the upward direction.
- Remove the seal unit 9) in the upward direction while keeping the drive shaft on the stopper at the flange bottom.


*A provisional seal system is available by option in which the provisional seal is activated to replace the seal without changing the inner tank pressure.

Featuring Operational Ease, Convenience and prolonged

Standard Dimensional Drawings for Removable Mechanical Seal Type — Top-mount Type

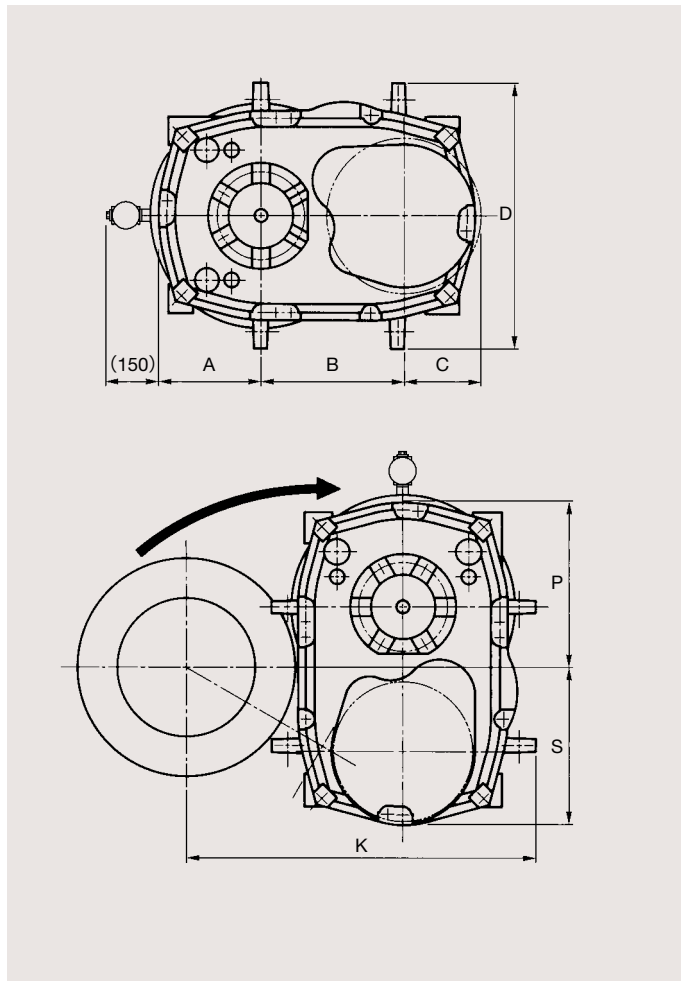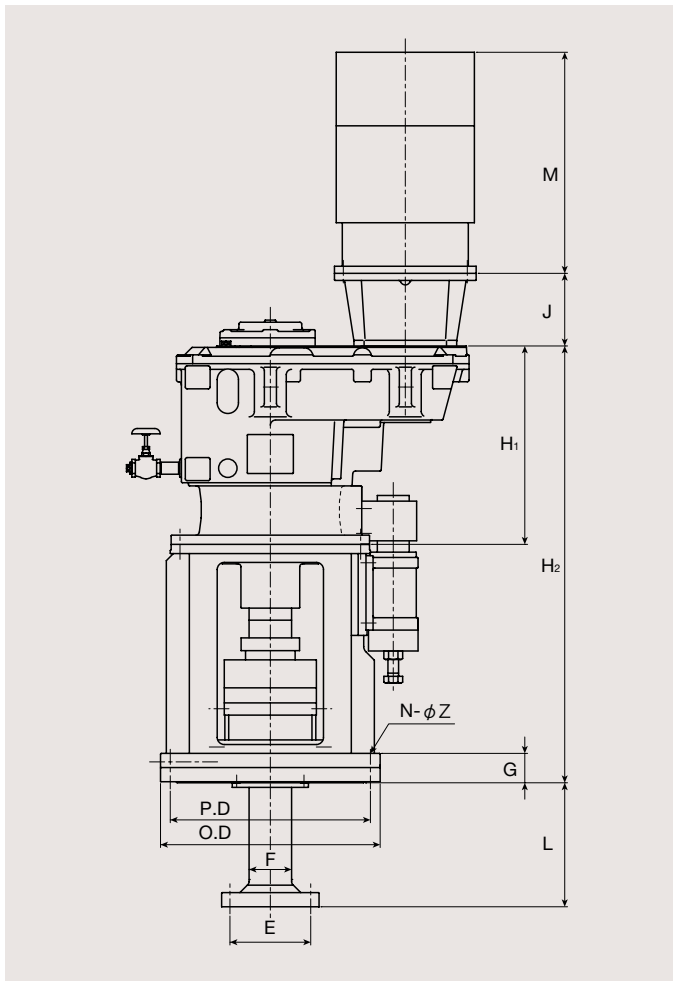

Round flange

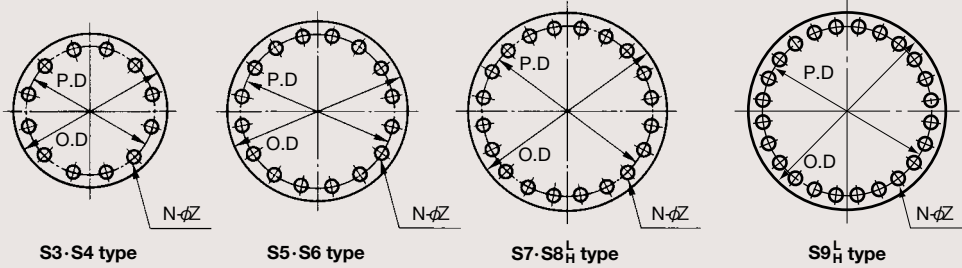

Because Satake makes every effort to improve the quality of its products, the product delivered to you may differ somewhat from the shape or specifications of the product described in this catalog.

Standard Dimensions for Removable Mechanical Seal — Top-mount Type

	Series	Motor output (kW)		Dimensions (mm)																	Approximate weight of mixer main unit (kg)** (Motor weight in bracket)			
		4P	6P	O.D	P.D	G	N-φZ	F	E	L	H ₁	H ₂	J*	A	B	C*	D	K	P	S*	M**			
One-step gear reduction	S3	5.5	3.7	350	310	59	12-23	55	137	200	418	827	—	162	119	214	402	467	233	262	400	350	(80)	
		7.5	5.5																			485	(110)	
	S4	11	7.5	400	355	61	12-25	65	157	200	517	958	—	175	138	216	446	530	257	272	485	470	(110)	
		15	11																			525	(130)	
	S5	18.5	15	445	400	61	16-25	85	207	250	619	1,115	—	208	176	251	522	607	301	335	575	750	(195)	
																						22	18.5	615
																								30
Two-step gear reduction • Three-step gear reduction	S3	0.75	—	350	310	59	12-23	55	137	200	272	681	—	162	224	109	402	467	233	262	260	280	(17)	
		1.5	—																		312	285	(24)	
		2.2	—																		328	290	(30)	
		3.7	—																		355	320	(48)	
	S4	0.75	—	400	355	61	12-25	65	157	200	329	770	—	175	239	115	446	530	257	272	260	350	(17)	
		1.5	0.75																		312	355	(24)	
		2.2	1.5																		328	365	(30)	
		3.7	—																		355	380	(48)	
		5.5	—																		307	400	415	(80)
	S5	2.2	1.5	445	400	61	16-25	85	207	250	389	885	12	208	287	141	522	607	301	335	328	530	(30)	
		3.7	2.2																		355	550	(48)	
		5.5	—																		400	580	(80)	
		7.5	—																		485	600	(110)	
		11	—																		525	620	(130)	
	S6	5.5	3.7	560	510	71	16-27	105	237	300	480	1,076	18	251	346	175	623	721	361	411	400	920	(80)	
		7.5	5.5																		400	920	(80)	
		11	—																		485	940	(110)	
		15	—																		525	960	(130)	
		18.5	—																		436	575	1,080	(195)
		22	—																		615	1,100	(225)	
	S7	—	5.5	620	565	73	20-27	120	275	350	560	1,183	18	265	381	180	680	814	392	434	400	1,230	(80)	
		11	7.5																		485	1,260	(110)	
		15	11																		525	1,280	(130)	
		18.5	—																		454	575	1,390	(195)
		22	—																		615	1,420	(225)	
		30	22																		479	660	1,540	(325)
	S8L	18.5	15	745	680	75	20-33	130	295	350	649	1,309	205	290	429	201	762	959	445	475	575	1,980	(195)	
		22	18.5																		615	2,010	(225)	
		37	—																		499	660	2,130	(325)
		45	—																		549	685	2,140	(365)
		55	45																		975	2,410	(630)	
		75	55																		1,075	2,500	(720)	
	S8H	22	15	745	680	75	20-33	150	335	350	649	1,369	205	290	429	201	762	959	445	475	575	2,120	(195)	
		30	18.5																		615	2,150	(225)	
		37	—																		499	660	2,260	(325)
		45	—																		549	685	2,280	(365)
		55	—																		975	2,550	(630)	
		90	75																		1,075	2,640	(720)	
	S9L	30	18.5	845	780	82	24-33	160	347	400	767	1,524	217	353	530	208	921	1,103	525	566	615	3,110	(225)	
		37	22																		583	660	3,210	(325)
		45	30																		633	685	3,260	(365)
		55	—																		975	3,530	(630)	
		75	—																		1,075	3,620	(720)	
	S9H	—	22	845	780	82	24-33	180	395	400	767	1,604	217	353	530	208	921	1,103	525	566	615	3,330	(225)	
		37	30																		583	660	3,450	(325)
		45	37																		633	685	3,490	(365)
		55	45																		975	3,760	(630)	
		75	—																		1,075	3,850	(720)	

*Dimensions J, C and S marked with asterisks in the table are based on the totally-enclosed fan-cooled outdoor-type motor. Those dimensions may vary in the case of a totally-enclosed safety-increased motor type of 22kw or more. Also those dimensions may vary depending on the motor manufacture.

**Dimension M marked with asterisk and weight of mixer main unit are based on the totally-enclosed fan-cooled outdoor-type motor.

Making every effort to develop and manufacture products
that satisfy customer needs and the demand for safety.



SATAKE MultiMix Corporation

Tokyo Office and Plant: 66, Niizo, Toda-shi, Saitama 335-0021, Japan
Phone: 81-48-433-8711
Fax: 81-48-433-8541

Osaka Office and Plant: 2-18-8, Toko-cho, Moriguchi-shi, Osaka 570-0035, Japan
Phone: 81-6-6992-0371
Fax: 81-6-6998-4947

Chubu Sales Service Center: 1-21-9, Heiwa, Naka-ku, Nagoya-shi, Aichi 460-0021, Japan
Phone: 81-52-331-6691
Fax: 81-52-331-2162

Mixing Technology Laboratory: 60, Niizo, Toda-shi, Saitama 335-0021, Japan
Phone: 81-48-441-9200
Fax: 81-48-444-1042

URL: <http://www.satake.co.jp>


(Overseas associated company)

China Satake (Shanghai) Trading Co., Ltd.
Room 605, Huaihaizhonghua Building, 885 Renmin Road, Shanghai 200010, China
Tel. 86-21-6437-7101 Fax. 86-21-6437-7102

Dalian Satake Chemical Equipment Co., Ltd.
Room 901, Jiachuang Building, No.2 Qixian Road, Hi-tech industrial Zone, Dalian 116023, China
Tel. 86-411-6688-8586 Fax. 86-411-6688-8591

Korea Hado Co., Ltd.
95, Gajaeul-ro, Seo-gu, Incheon, 22830, Korea
Tel. 82-32-583-6321 Fax. 82-32-583-6329

Taiwan Kwan-Tai Machinery Co., Ltd.
15, Kegong 7th rd., Douliu city, Yunlin country 64001, Taiwan, R.O.C.
Tel. 886-5-551-7858 Fax. 886-5-551-7921



ISO 9001 Certification Granted to
Tokyo office and Osaka office